## (19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 18 August 2005 (18.08.2005)

**PCT** 

## (10) International Publication Number WO 2005/076257 A3

(51) International Patent Classification: 3/36, 5/00, G02F 1/1335

G09G 5/02,

(21) International Application Number:

PCT/IL2005/000161

(22) International Filing Date: 9 February 2005 (09.02.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/542,283 60/549,540 9 February 2004 (09.02.2004) US 4 March 2004 (04.03.2004) US

- (71) Applicant (for all designated States except US): GENOA COLOR TECHNOLOGIES LTD. [IL/IL]; 10 HaSadnaot St., 48611 Rosh Ha'ayin (IL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): BEN-DAVID, Ilan [IL/IL]; 55 Hapa'amon Street, 48611 Rosh Ha'ayin (IL). WEISS, Nir [IL/IL]; Sokolov 86, 46497 Herzliya (IL).


- (74) Agents: PEARL COHEN ZEDEK LATZER et al.; 5 Shenkar Street, 46733 Herzlia (IL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

with international search report

[Continued on next page]

(54) Title: METHOD DEVICE, AND SYSTEM OF DISPLAYING A MORE-THAN-THREE PRIMARY COLOR IMAGE

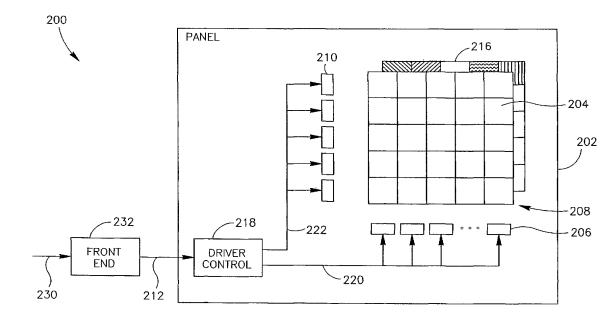

(57) Abstract: Embodiments of the invention include a method, device and/or system for displaying a more than three primary color (RGB) image. The device (100,200) may include, for example, a driver control module (218) to controllably activate one or more drivers (206,210) of an array of sub-pixel elements of at least four primary colors based on image data representing pixels of the color image in terms of at least three primary colors (RGB). Other embodiments are described and claimed.



## WO 2005/076257 A3



 before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

 $\textbf{(88)} \ \ \textbf{Date of publication of the international search report:}$ 

22 September 2005